



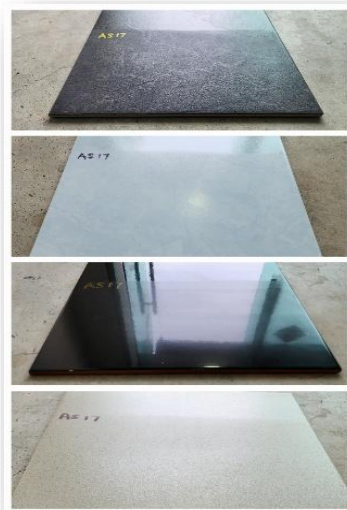

WARRIOR® AS-17

ANTI SLIP

SURFACE ETCHING ANTI SLIP AND CLEANING SOLUTION

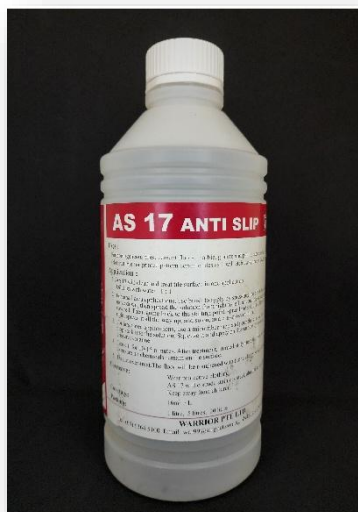

FEATURES

- AS-17 has a **gentle-to-tiles** formulation that create slip resistance with minimal surface changes.
- AS-17 allows for better control and balance between surface grip and surface appearance change.
- AS-17 creates non-slip surface on multiple substrates, by etching the surface materials and creating microscopic pores and grooves.
- AS-17 is not a surface coating- no delaminating, blistering or peeling issue.
- Treated area can be used immediately upon job completion, no curing time needed.

APPLICATION METHODS

1. Clean and dry the surface to be treated.
(For new waxed tiles, remove the surface wax prior to application, to ensure even coverage and uniform effect.)
2. Apply AS-17 evenly onto the surface to be treated.
3. Allow AS-17 to etch the surface for 20 minutes. (Do not step onto the treated surface throughout the treatment and waiting period.)
4. Wash and rinse the treated surface thoroughly.
5. Job done.

AS-17 can also be used to etch away the surface dirt on concrete surface, exposing fresh and clean concrete layer.



WARRIOR® AS-17

ANTI SLIP

SURFACE ETCHING ANTI SLIP AND CLEANING SOLUTION

REMARKS

- *For extra anti-slip effect, repeat the treatment process above.*
- *Do not apply single thick coat nor etch for too long, to prevent over-roughening and uneven surface appearance. Surface etching is a non-reversible effect.*
- *Do a patch test to check for changes in surface appearance, prior to full scale application.*
- *AS-17 is corrosive and can corrode stainless steel and aluminium.*

SAFETY PRECAUTIONS

1. Wear nitrile gloves, gumboots and safety goggles. Ensure good ventilation at site.
2. Skin contact: Wash immediately with soap and plenty of water.
3. Eye contact: Flush the eye for 15 minutes with plenty of water and seek medical attention immediately

COVERAGE

+/- 16m²/kg

PACKING

1 kg-bottle